

Льдогенераторы серий IT1200С, IT1430С, IT1830С

Технические характеристики

По вопросам продаж и поддержки обращайтесь:

Алматы (727)345-47-04
Ангарск (3955)60-70-56
Архангельск (8182)63-90-72
Астрахань (8512)99-46-04
Барнаул (3852)73-04-60
Белгород (4722)40-23-64
Благовещенск (4162)22-76-07
Брянск (4832)59-03-52
Владивосток (423)249-28-31
Владикавказ (8672)28-90-48
Владимир (4922)49-43-18
Волгоград (844)278-03-48
Вологда (8172)26-41-59
Воронеж (473)204-51-73
Екатеринбург (343)384-55-89

Иваново (4932)77-34-06
Ижевск (3412)26-03-58
Иркутск (395)279-98-46
Казань (843)206-01-48
Калининград (4012)72-03-81
Калуга (4842)92-23-67
Кемерово (3842)65-04-62
Киров (8332)68-02-04
Коломна (4966)23-41-49
Кострома (4942)77-07-48
Краснодар (861)203-40-90
Красноярск (391)204-63-61
Курск (4712)77-13-04
Курган (3522)50-90-47
Липецк (4742)52-20-81

Магнитогорск (3519)55-03-13
Москва (495)268-04-70
Мурманск (8152)59-64-93
Набережные Челны (8552)20-53-41
Нижний Новгород (831)429-08-12
Новокузнецк (3843)20-46-81
Ноябрьск (3496)41-32-12
Новосибирск (383)227-86-73
Омск (3812)21-46-40
Орел (4862)44-53-42
Оренбург (3532)37-68-04
Пенза (8412)22-31-16
Петрозаводск (8142)55-98-37
Псков (8112)59-10-37
Пермь (342)205-81-47

Ростов-на-Дону (863)308-18-15
Рязань (4912)46-61-64
Самара (846)206-03-16
Санкт-Петербург (812)309-46-40
Саратов (845)249-38-78
Севастополь (8692)22-31-93
Саранск (8342)22-96-24
Симферополь (3652)67-13-56
Смоленск (4812)29-41-54
Сочи (862)225-72-31
Ставрополь (8652)20-65-13
Сургут (3462)77-98-35
Сыктывкар (8212)25-95-17
Тамбов (4752)50-40-97
Тверь (4822)63-31-35

Тольятти (8482)63-91-07
Томск (3822)98-41-53
Тула (4872)33-79-87
Тюмень (3452)66-21-18
Ульяновск (8422)24-23-59
Улан-Удэ (3012)59-97-51
Уфа (347)229-48-12
Хабаровск (4212)92-98-04
Чебоксары (8352)28-53-07
Челябинск (351)202-03-61
Череповец (8202)49-02-64
Чита (3022)38-34-83
Якутск (4112)23-90-97
Ярославль (4852)69-52-93

Россия +7(495)268-04-70

Казахстан +7(727) 345-47-04

Беларусь +(375) 257-127-884

Узбекистан +998(71)205-18-59

Киргизия +996(312)96-26-47

эл.почта: mwc@nt-rt.ru || сайт: <https://manitowoc.nt-rt.ru/>

QuietQube® iT1200C Remote Ice Cube Machine

Air-Cooled Ice Cube Machine with Patented CVD Technology®

QuietQube® iT1200C Remote Ice Cube Machine
Air-Cooled Ice Cube Machine with Patented CVD Technology®

Model

☐ IDT1200C

☐ IYT1200C



iT1200C Ice Cube Machine - 115V



CVD Condensing Unit - 230V



iT1200C Ice Machine on a D570 bin
*Ice machine and bin sold separately

Standard Features

QuietQube Series Remote System consists of a remote condensing unit, interconnecting refrigerant lines, ice machine head section along with an ice storage bin, countertop dispenser, or floor dispenser. All ordered separately. QuietQube ice machine with CVD condensing unit is designed as a Manitowoc system and cannot be used with any other ice machine or remote condenser brand.

- **New Levels of Performance** – showcasing an average of 8% reduction in energy consumption and 10% increase in ice production.
- **easyTouch® Display** - New icon based touch screen takes the guess work out of owning and operating an ice machine.
- **Programmable Ice Production** – Now its super easy to program your ice machine to be off at certain times of the day to save money with fluctuating electrical rates. Also programmable by daily ice production volume and night time programming.
- **Easy to Clean Foodzone** – Hinged door for easy access. Removable water-trough, distribution tube, curtain, water probe and water pump for fast and efficient cleaning. Selected components are made with AlphaSan® antimicrobial.
- **Intelligent Diagnostics** – Provides 24 hour preventative maintenance and diagnostic feedback for trouble free operation.
- **Acoustical Ice Sensing Probe** – Unique patented technology allows for reliable operation in challenging water conditions and environments
- **DuraTech® Exterior** – Provides superior corrosion resistant above stainless steel. Innovative clear-coat resists fingerprints and dirt making it easier to keep clean.
- **Available LuminIce® II Virus and Bacteria Inhibitor** – Controls viruses, bacteria, mold and yeast within the food zone to keep the machine clean longer. A new sanitation icon lets you know the operational status.
- **Active Sense** – insures consistent ice harvest in all environmental conditions. This software works in conjunction with the acoustical ice sensing probe improving reliability and performance.

Ice Shape



Half Dice
3/8" x 1 1/8" x 7/8"
(.95 x 2.86 x 2.22 cm)




Dice
7/8" x 7/8" x 7/8"
(2.22 x 2.22 x 2.22 cm)





iT1200C Ice Machine

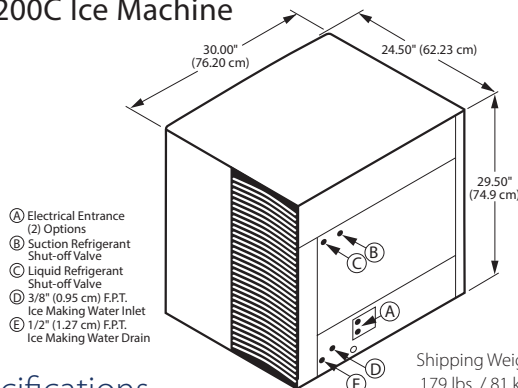

Shipping Weight:
179 lbs. / 81 kgs.

Specifications

Operating Limits:

- Ambient Temperature Range: 40° to 110°F (4.4° to 43.3°C)
- Water Temperature Range: 40° to 90°F (4.4° to 32.2°C)
- Water Pressure Ice Maker Water In: Min. 20 psi (137.9 kPa) Max. 80 psi (551.1 kPa)

Installation Note Minimum

Installation Clearance:

Top/sides: 5" (12.7 cm)
Back is 5" (12.7 cm)

LuminIce® II Virus and Bacteria Inhibitor Accessory

controls viruses and bacteria inside the ice machine

Ice Machine Electric

115/60/1 standard.

Total Amps: 1.1

Max. fuse size: 15 amps

HACR-type circuit breakers can be used in place of fuses.

iAuCS® Accessory

schedules and performs routine ice machine cleaning automatically.




Remote Air-cooled Ice Machine

Model	Ice Shape	Ice Production 24 Hours		Power kWh/ 100 lbs* @ 90°/70°F
		70°Air/ 50°F Water	90°Air/ 70°F Water	
IDT1200C	dice	1,130 lbs.	930 lbs.	4.60
		513 kgs.	422 kgs.	
IYT1200C	half-dice	1,155 lbs.	955 lbs.	4.60
		525 kgs.	433 kgs.	
Potable Water: 19.9 gallons, 75.3 liters				

Ice machine for use with ice storage bin or ice dispenser and CVD condensing unit all ordered separately.

*kWh per 100 lbs. is total power of ice machine and condensing unit. Ice machine is 1 ph only.
Condensing unit is 1 ph or 3 ph.

CVDT1200 Remote Condensing Unit

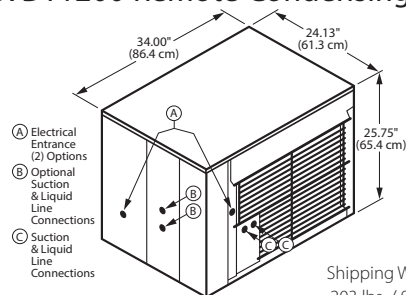

Shipping Weight:
203 lbs. / 92 kgs.

Condensing Unit Electric

208-230/60/1 standard. 208-230/60/3. HACR-type circuit breakers can be used in place of fuses.

Note: QuietQube ice machine power supply is wired independent of CVD condensing unit.

Min. circuit ampacity: (Refer to Data Plate)

14.8 amps 1ph 9.3 amps 3ph

Max. fuse size: (Refer to Data Plate)

25 amps 1ph 15 amps 3ph

HACR-type circuit breakers can be used in place of fuses.

Operating Limits:

- Ambient Temperature Range: -20° to 130°F (-29° to 54°C)

BTU Per Hour:

16,200 (average) 19,100 (peak)

Compressor:

Nominal rating: 1.5 HP

Installation Information and Dimensions:

Maximum Line Length

—100' (30.5 m).*


Maximum Vertical Rise*

—35' (10.7 m) above ice machine.

Maximum Vertical Drop

—15' (4.5 m) below ice machine.

*A rise over 20' (6 m) requires S-Trap Kit K-00172 - ordered separately.



Model	Line Length		Weight	
	ft.	m.	lbs.	kgs.
RC-21	20	6	12	5
RC-31	30	9	20	9
RC-51	50	15	28	13

Arcti Pure Plus Water Filters

AR-PRE-P

Filters dirt, rust and hard sediments down to 5 micron.



AR-40000-P

Ultra fin filtration reduces chlorine and contaminants down to 0.5 microns. Use of a pre-filter is recommended.



QuietCube® IT1430C Remote Ice Cube Machine

Model: ☐ IDT1430C ☐ IYT1430C



IDT1430C Ice Cube Machine - 115V



CVDT1400 Condensing Unit



IDT1430C Ice Machine
on a D-970 Bin



Two IDT1430C Ice Machines
on a LB1760 Bin

*Ice machine and bin sold separately

Air-Cooled Ice Cube Machine with Patented CVD Technology®

QuietCube Series Remote System consists of a remote condensing unit, interconnecting refrigerant lines, ice machine head section along with an ice storage bin, countertop dispenser, or floor dispenser. All ordered separately. QuietCube ice machine with CVD condensing unit is designed as a Manitowoc system and cannot be used with any other ice machine or remote condenser brand.

- **Space-Saving Design** – Up to 1,437 lbs. (651 kgs.) daily ice production and only 30" (76.20 cm) wide.
- **Quiet Operation** – eliminates most noise from the refrigeration system. Promotes a relaxing atmosphere.
- **easyTouch® Display** – New icon based touch screen takes the guess work out of owning and operating an ice machine.
- **Programmable Ice Production** – Now its super easy to program your ice machine to be off at certain times of the day to save money with fluctuating electrical rates. Also programmable by daily ice production volume and night time programming.
- **Easy to Clean Foodzone** – Hung door for easy access. Removable water-trough, distribution tube, splash guard, water probe and water pump for fast and efficient cleaning. Selected components are made with AlphaSan® antimicrobial.
- **Intelligent Diagnostics** – Provides 24 hour preventative maintenance and diagnostic feedback for trouble free operation.
- **Acoustical Ice Sensing Probe** – Unique patented technology allows for reliable operation in challenging water conditions and environments
- **DuraTech® Exterior** – Provides superior corrosion resistant above stainless steel. Innovative clear-coat resists fingerprints and dirt making it easier to keep clean.
- **Available LuminIce® II Virus and Bacteria Inhibitor** – Controls viruses, bacteria, mold and yeast within the food zone to keep the ice machine clean longer. A new sanitation icon lets you know the operational status.
- **Active Sense** – Insures consistent ice harvest in all environmental conditions. This software solution works in conjunction with the acoustical ice sensing probe improving reliability and performance.

Ice Shape



Half Dice

$\frac{3}{8}" \times 1\frac{1}{8}" \times \frac{7}{8}"$
(0.95 x 2.86 x 2.22 cm)



Dice

$\frac{7}{8}" \times \frac{7}{8}" \times \frac{7}{8}"$
(2.22 x 2.22 x 2.22 cm)

Commercial Warranty

Ice Maker three (3) years parts and labor


Evaporator five (5) years parts and labor

Compressor five (5) years parts, three (3) years labor



QuietQube® IT1430C Remote Ice Cube Machine

IT1430C Ice Machine

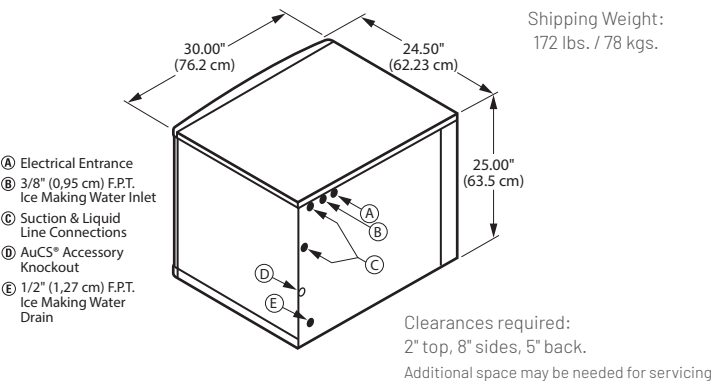

Specifications

Operating Limits:

Ambient Temperature Range: 40° to 110°F (4.4° to 43.3°C)

Water Temperature Range: 40° to 90°F (4.4° to 32.2°C)

Water Pressure Ice Maker Water In: Min. 20 psi (137.9 kPa) Max. 80 psi (551.1 kPa)

Ice Machine Electric

115/60/1 standard.

Total Amps: 1.1

Max. fuse size: 15 amps

HACR-type circuit breakers can be used in place of fuses.

Remote Air-Cooled Ice Machine

Model	Ice Shape	Ice Production 24 Hours		Power kWh/100 lbs @ 90°/70°F*	Portable Water Usage 100 lbs. 45.4 kg of Ice*
		70° Air/ 50° F Water	90° Air/ 70° F Water		
IDT1430C	dice	1,320 lbs/599 kgs	1,120 lbs/508 kgs	4.34	19.9 gal / 75.33L
IYT1430C	half-dice	1,437 lbs/652 kgs	1,210 lbs/549 kgs	4.10 ★	

Water usage/100 lbs./45.4 kgs. of Ice.

Potable Water:* 18.5 gallons, 70 liters

Ice machine for use with ice storage bin or ice dispenser and CVD condensing unit all ordered separately.


kWh per 100 lbs. is total power of ice machine and condensing unit.

Ice machine is 1 ph only. Condensing unit is 1 ph or 3 ph.

*Ratings Certified in Accordance with AHRI Standard 810.

★ENERGY STAR® 3.0

CVDT1400 Remote Condensing Unit

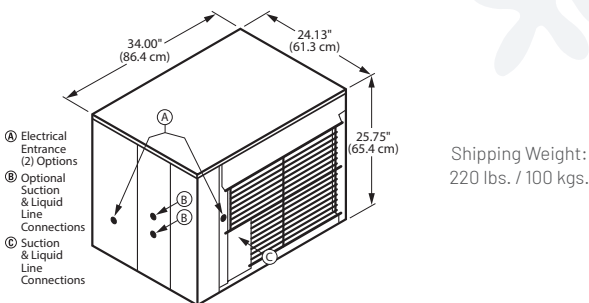

Condensing Unit Electric

208-230/60/1 standard: 208-230/60/3 HACR-type circuit breakers can be used in place of fuses. Note: QuietQube ice machine power supply is wired independent of CVD condensing unit.

Min. circuit ampacity: 20 1ph / 15 3ph

Max. fuse size: 20 amps 1ph / 15 amps 3ph

HACR-type circuit breakers can be used in place of fuses.

Operating Limits: Ambient temperature range: -20° to 120°F (-29° to 48.9°C)

BTU Per Hour: 17,800 (average) 20,500 (peak)

Compressor: Nominal rating: 1.75 HP


Installation Information and Dimensions:

Maximum Line Length —100' (30.5 m).*

Maximum Vertical Rise* —35' (10.7 m) above ice machine.

Maximum Vertical Drop —15' (4.5 m) below ice machine.

*A rise over 20' (6 m) requires S-Trap Kit K-00172 - ordered separately.



Standard Interconnecting Tubing

Model	Line Length		Weight	
	ft.	m.	lbs.	kgs.
RC-21	20	6	12	5
RC-31	30	9	17	8
RC-51	50	15	27	12

Accessories

LuminIce® Virus and Bacteria Inhibitor

Controls viruses and bacteria in the ice machine.



iAuCS®

Schedules and performs routine ice machine cleaning automatically.



Arctic Pure® Plus Water Filters

Reduces sediments and contaminants down to 0.5 microns, and 95% of chlorine taste & odor. Use with a pre-filter is recommended.



External Scoop Holder

Protect the ice scoop with the NSF-approved versatile scoop holder.



QuietQube® IT1830C Remote Ice Cube Machine

Model: ☐ IDT1830C ☐ IYT1830C



IDT1830C Ice Cube Machine - 115V



CVDT1800 Condensing Unit 208 V



IDT1830C Ice Machine
on a D-970 Bin



Two IDT1830C Ice Machines
on a LB1760 Bin

*Ice machine and bin sold separately

Air-Cooled Ice Cube Machine with Patented CVD Technology®

QuietQube Series Remote System consists of a remote condensing unit, interconnecting refrigerant lines, ice machine head section along with an ice storage bin, countertop dispenser, or floor dispenser. All ordered separately. QuietQube ice machine with CVD condensing unit is designed as a Manitowoc system and cannot be used with any other ice machine or remote condenser brand.

- **Space-Saving Design** – Up to 1,874 lbs. (850 kgs.) daily ice production and only 30" (76.20 cm) wide.
- **Quiet Operation** – eliminates most noise from the refrigeration system. Promotes a relaxing atmosphere.
- **easyTouch® Display** – New icon based touch screen takes the guess work out of owning and operating an ice machine.
- **Programmable Ice Production** – Now its super easy to program your ice machine to be off at certain times of the day to save money with fluctuating electrical rates. Also programmable by daily ice production volume and night time programming.
- **Easy to Clean Foodzone** – Hung door for easy access. Removable water-trough, distribution tube, splash guard, water probe and water pump for fast and efficient cleaning. Selected components are made with AlphaSan® antimicrobial.
- **Intelligent Diagnostics** – Provides 24 hour preventative maintenance and diagnostic feedback for trouble free operation.
- **Acoustical Ice Sensing Probe** – Unique patented technology allows for reliable operation in challenging water conditions and environments
- **DuraTech® Exterior** – Provides superior corrosion resistant above stainless steel. Innovative clear-coat resists fingerprints and dirt making it easier to keep clean.
- **Available LuminIce® II Virus and Bacteria Inhibitor** – Controls viruses, bacteria, mold and yeast within the food zone to keep the ice machine clean longer. A new sanitation icon lets you know the operational status.
- **Active Sense** – Insures consistent ice harvest in all environmental conditions. This software solution works in conjunction with the acoustical ice sensing probe improving reliability and performance.

Ice Shape



Half Dice

$\frac{3}{8}" \times 1\frac{1}{8}" \times \frac{7}{8}"$
(0.95 x 2.86 x 2.22 cm)



Dice

$\frac{7}{8}" \times \frac{7}{8}" \times \frac{7}{8}"$
(2.22 x 2.22 x 2.22 cm)

Commercial Warranty

Ice Maker three (3) years parts and labor


Evaporator five (5) years parts and labor

Compressor five (5) years parts, three (3) years labor



QuietQube® IT1830C Remote Ice Cube Machine

IT1830C Ice Machine

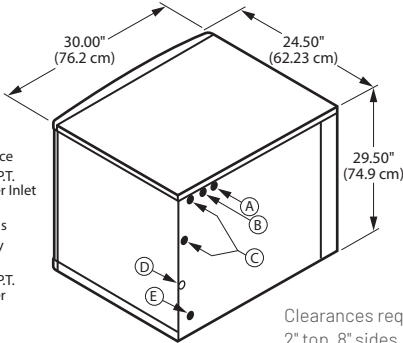

Shipping Weight:
223 lbs. / 109 kgs.

Clearances required:
2" top, 8" sides, 5" back.
Additional space may be needed for servicing

① Electrical Entrance
② 3/8" (0.95 cm) F.P.T. Ice Making Water Inlet
③ Suction & Liquid Line Connections
④ AuCS® Accessory Knockout
⑤ 1/2" (1.27 cm) F.P.T. Ice Making Water Drain

Specifications

Operating Limits:

Ambient Temperature Range:
40° to 110°F (4.4° to 43.3°C)

Water Temperature Range:
40° to 90°F (4.4° to 32.2°C)

Water Pressure Ice Maker Water In:
Min. 20 psi (137.9 kPa)
Max. 80 psi (551.1 kPa)



Ice Machine Electric

115/60/1 standard. (230/50/1 also available, consult factory.)

Total Amps: 1.1

Max. fuse size: 15 amps
HACR-type circuit breakers can be used in place of fuses.

Remote Air-Cooled Ice Machine

Model	Ice Shape	Ice Production 24 Hours		Power kWh/ 100 lbs @ 90°/70°F*
		70° Air/ 50° F Water	90° Air/ 70° F Water	
IDT1830C	dice 	1,771 lbs/803 kgs	1,500 lbs/680 kgs	4.04 ★
IYT1830C	half-dice 	1,874 lbs/850 kgs	1,560 lbs/708 kgs	4.02 ★

Water usage/100 lbs./45.4 kgs. of Ice. ★ ENERGY STAR® 3.0

Potable Water:* 18.5 gallons, 70 liters


Ice machine for use with ice storage bin or ice dispenser and CVD condensing unit all ordered separately.

kWh per 100 lbs. is total power of ice machine and condensing unit.

Ice machine is 1 ph only. Condensing unit is 1 ph or 3 ph.

*Ratings Certified in Accordance with AHRI Standard 810.

CVDT1800 Remote Condensing Unit



Shipping Weight:
223 lbs. / 109 kgs.

① Electrical Entrance (2) Options
② Optional Suction & Liquid Line Connections
③ Suction & Liquid Line Connections

Condensing Unit Electric

208-230/60/1 standard: 208-230/60/3. HACR-type circuit breakers can be used in place of fuses. Note: QuietQube ice machine power supply is wired independent of CVD condensing unit.

Min. circuit ampacity: 25 1ph / 20 3ph

Max. fuse size: 40 amps 1ph / 25 amps 3ph

HACR-type circuit breakers can be used in place of fuses.

Operating Limits: Ambient temperature range: -20° to 130°F (-29° to 54°C)

BTU Per Hour: 27,000 (average) 31,000 (peak)

Compressor: Nominal rating: 2.5 HP


Installation Information and Dimensions:

Maximum Line Length –100' (30.5 m).*

Maximum Vertical Rise* –35' (10.7 m) above ice machine.

Maximum Vertical Drop –15' (4.5 m) below ice machine.

*A rise over 20' (6 m) requires S-Trap Kit K-00166 - ordered separately.



Standard Interconnecting Tubing

Model	Line Length		Weight	
	ft.	m.	lbs.	kgs.
RC-20	20	6	14	6
RC-30	30	9	20	9
RC-50	50	15	31	14

Accessories

LuminIce® Virus and Bacteria Inhibitor

Controls viruses and bacteria in the ice machine.



iAuCS®

Schedules and performs routine ice machine cleaning automatically.



Arctic Pure® Plus Water Filters

Reduces sediments and contaminants down to 0.5 microns, and 95% of chlorine taste & odor. Use with a pre-filter is recommended.



По вопросам продаж и поддержки обращайтесь:

Алматы (727)345-47-04
Ангарск (3955)60-70-56
Архангельск (8182)63-90-72
Астрахань (8512)99-46-04
Барнаул (3852)73-04-60
Белгород (4722)40-23-64
Благовещенск (4162)22-76-07
Брянск (4832)59-03-52
Владивосток (423)249-28-31
Владикавказ (8672)28-90-48
Владимир (4922)49-43-18
Волгоград (844)278-03-48
Вологда (8172)26-41-59
Воронеж (473)204-51-73
Екатеринбург (343)384-55-89

Иваново (4932)77-34-06
Ижевск (3412)26-03-58
Иркутск (395)279-98-46
Казань (843)206-01-48
Калининград (4012)72-03-81
Калуга (4842)92-23-67
Кемерово (3842)65-04-62
Киров (8332)68-02-04
Коломна (4966)23-41-49
Кострома (4942)77-07-48
Краснодар (861)203-40-90
Красноярск (391)204-63-61
Курск (4712)77-13-04
Курган (3522)50-90-47
Липецк (4742)52-20-81

Магнитогорск (3519)55-03-13
Москва (495)268-04-70
Мурманск (8152)59-64-93
Набережные Челны (8552)20-53-41
Нижегород (831)429-08-12
Новокузнецк (3843)20-46-81
Ноябрьск (3496)41-32-12
Новосибирск (383)227-86-73
Омск (3812)21-46-40
Орел (4862)44-53-42
Оренбург (3532)37-68-04
Пенза (8412)22-31-16
Петрозаводск (8142)55-98-37
Псков (8112)59-10-37
Пермь (342)205-81-47

Ростов-на-Дону (863)308-18-15
Рязань (4912)46-61-64
Самара (846)206-03-16
Санкт-Петербург (812)309-46-40
Саратов (845)249-38-78
Севастополь (8692)22-31-93
Саранск (8342)22-96-24
Симферополь (3652)67-13-56
Смоленск (4812)29-41-54
Сочи (862)225-72-31
Ставрополь (8652)20-65-13
Сургут (3462)77-98-35
Сыктывкар (8212)25-95-17
Тамбов (4752)50-40-97
Тверь (4822)63-31-35

Тольятти (8482)63-91-07
Томск (3822)98-41-53
Тула (4872)33-79-87
Тюмень (3452)66-21-18
Ульяновск (8422)24-23-59
Улан-Удэ (3012)59-97-51
Уфа (347)229-48-12
Хабаровск (4212)92-98-04
Чебоксары (8352)28-53-07
Челябинск (351)202-03-61
Череповец (8202)49-02-64
Чита (3022)38-34-83
Якутск (4112)23-90-97
Ярославль (4852)69-52-93

Россия +7(495)268-04-70

Казахстан +7(727) 345-47-04

Беларусь +(375) 257-127-884

Узбекистан +998(71)205-18-59

Киргизия +996(312)96-26-47

эл.почта: mwc@nt-rt.ru || сайт: <https://manitowoc.nt-rt.ru/>